
Kunena-Discord


Release 2.0.0

Michael Pfister

Jun 17, 2020

CONTENTS

| | |
|-----------------------------|----------|
| 1 Overview | 3 |
| 1.1 Requirements | 3 |
| 1.2 Installation | 3 |
| 2 Usage | 5 |
| 2.1 Settings | 5 |
| 3 Code Documentation | 7 |
| 3.1 Classes | 7 |
| Index | 9 |

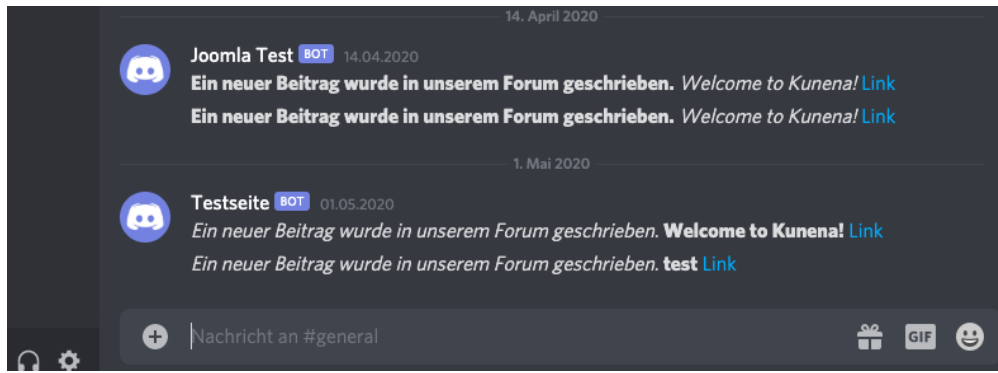

OVERVIEW

1.1 Requirements

- PHP ≥ 7.2
- Joomla ≥ 3.8
- Kunena ≥ 5.0


1.2 Installation

Use the standard Joomla installation process.

2.1 Settings

2.1.1 Website URL

If you have problems with the backlink in your Discord messages, you can set your website URL in the plugin settings.

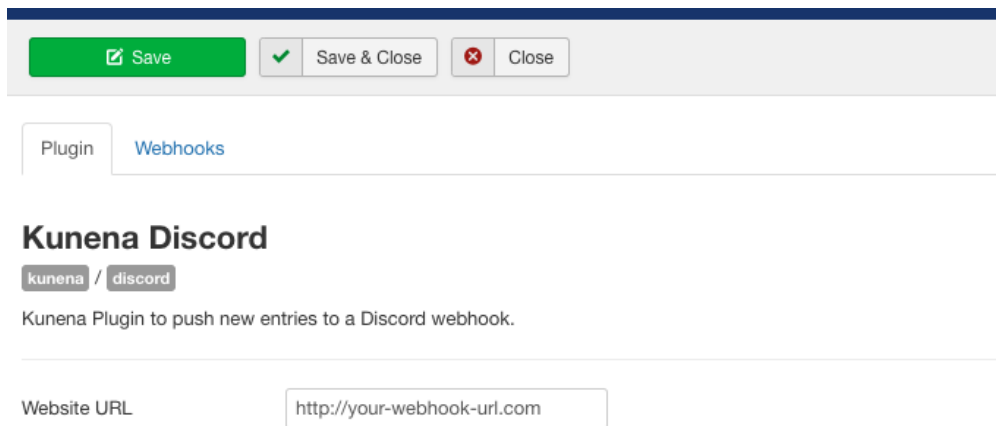

The screenshot shows the Joomla! administrator interface for the Kunena Discord plugin settings. At the top, there is a control bar with three buttons: a green 'Save' button with a checkmark icon, a 'Save & Close' button with a green checkmark icon, and a 'Close' button with a red 'X' icon. Below this, there are two tabs: 'Plugin' and 'Webhooks', with 'Webhooks' being the active tab. The main heading is 'Kunena Discord', followed by a breadcrumb trail 'kunena / discord'. A descriptive text reads: 'Kunena Plugin to push new entries to a Discord webhook.' Below this, there is a form field labeled 'Website URL' with the value 'http://your-webhook-url.com' entered.

2.1.2 Discord

Read about how to setup a [Discord Webhooks](#).

You can setup up to 10 hooks to match certain Kunena categories. If you want all new Kunena posts send to the same webhook, just use the first field and let the categories selection empty.

The screenshot shows the configuration interface for the Kunena-Discord plugin. At the top, there is a navigation bar with three buttons: a green 'Save' button with a checkmark icon, a 'Save & Close' button with a green checkmark icon, and a 'Close' button with a red 'X' icon. Below the navigation bar, there are two tabs: 'Plugin' and 'Webhooks', with 'Webhooks' being the active tab. The main content area contains a list of configuration fields for up to 10 webhooks. The first row is pre-filled with a 'Webhook URL' of 'https://discordapp.com/api/webhoc' and a 'Categories' dropdown menu with 'Welcome Mat' selected. The second row has an empty 'Webhook URL' field and a 'Categories' dropdown menu with 'Suggestion Box' selected. The remaining three rows have empty 'Webhook URL' fields and 'Categories' dropdown menus with the placeholder text 'Type or select some options'.

CODE DOCUMENTATION

3.1 Classes

3.1.1 plgKunenaDiscord Class

```
class plgKunenaDiscord
    plgKunenaDiscord class

    __construct ($subject, array $config = array())
        ConstructorMethod

        Parameters

            • $subject (str) –
            • $config (array) –

    onKunenaGetActivity ()
        Get Kunena activity stream integration object.

        Returns KunenaDiscord
```

3.1.2 KunenaDiscord Class

```
class KunenaDiscord
    KunenaDiscord class

    __construct (array $webhooks, $domain)
        Constructor

        Parameters

            • $webhooks (array) – the configured webhooks
            • $domain (str) – the configured domain

    onAfterReply ($message)
        Prepares and sends the messages after a reply is made

        Parameters

            • $message (KunenaForumMessage) – the Kunena Message

    onAfterPost ($message)
        Prepares and sends the messages after a new post is made

        Parameters
```

- **\$message** (*KunenaForumMessage*) – the Kunena Message

Symbols

`__construct()` (*KunenaDiscord method*), 7
`__construct()` (*plgKunenaDiscord method*), 7

K

`KunenaDiscord` (*class*), 7

O

`onAfterPost()` (*KunenaDiscord method*), 7
`onAfterReply()` (*KunenaDiscord method*), 7
`onKunenaGetActivity()` (*plgKunenaDiscord method*), 7

P

`plgKunenaDiscord` (*class*), 7